


Luna Arctic Triple 32x140 Brushed



CLADDING & PANELING

PRODUCT DETAILS

Size	32x140
Class	LunaThermo-D
Surface	Brushed
Species	Nordic spruce, <i>Picea abies</i>
Lenghts	3,9 - 5,4 m (availability varies) Length package in 30 cm modules
Utility data	Coverage width 132 mm, 7,6 rm/m ² Weight average ~1,7 kg/m ~12,9 kg/m ²
Packaging	Package size 112 pcs (Sea freight package) 4 pcs/bundle, 28 bundles/package. Package covered by Lunawood plastic hood on 5 sides
Article	32x140 Triple Brushed Thermo-D WW SAP A Arctic 3s
Product specifications	Tolerances, quality and installation based on. Lunawood general rules and instructions. Nominal size: 38x150 DoP: No 040
Installation	Follow Lunawood Installation Guideline. Universal tone codes for sealing the cutting ends. NCS S 4502 R and RAL7036
Maintenance	Not required. Handled as ThermoWood®

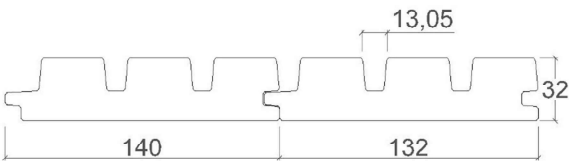

LUNAWOOD TECHNICAL DATASHEET

Essential Characteristics	Spruce (<i>Picea abies</i>)	Harmonized European standard
Density	420 kg / m ³	SFS-EN 317
Reaction to fire class	NPD	SFS-EN 13501
Screw traction resistance	-	SFS-EN 13446
Thermal conductivity	0,09 W/(m·K)	EN ISO 13787 + EN 12667
Durability class	Class 2 Thermo-D	EN 350-1
Use class	Class 3 Thermo-D	EN 335
Stability, shrinking and swelling	Tangential fibre direction 4 % Radial fibre direction 2 %	SFS-EN 317
Equilibrium Moisture	7,3 %	EN 13183-1
Brinell Hardness	1,52 N/mm ²	SFS-EN 1534
Janka	1700 N	ASTM D143-94
TVOC	Thermo-D 0,077 mg/m2h	ISO 16000-9:2006 SFS-EN 16516:2017
CO2 emissions (EPD)	117 kg CO2 eq/m ³	Lunawood EPD

Use QR code by phone or click it to open to Your browser



Product documents



Design tools

Version: 8/2024